

ROLLER SHUTTER

Gate and roller shutter controller

AURATON Roller Shutter is a controller for operating electric roller shutters, awnings, roof windows, skylights and garage doors. Thanks to it and the AURATON Pulse control panel, the user can control actuators using a mobile application – AURATON Smart App. Depending on your preferences, AURATON Roller Shutter can open and close roller shutters at specific times, close roof windows in the event of rain, or, with a single click on your phone, close roller shutters throughout your home to protect it from burglary. AURATON Roller Shutter works with devices up to 240V AC and fits into deep Ø60 mm junction boxes.





-  operation of roller shutters, awnings, gates and roof windows
-  secure connection with AURA protocol
-  convenient management of connected devices
-  accurate measurement of energy consumption



TECHNICAL DATA

AC supply voltage	60-240 V AC, 50-60 Hz
Maximum power consumption	≤1 W
Power consumption in stand-by mode	≤0,4 W
Operating temperature range	0 – 35°C
Type, and max. permissible cross-section of power supply cable	3 x 2,5 mm ²
Permissible load	resistive load: up to 4.3 A (<1 kW) inductive load: 1.7 A
Security type	Required external overcurrent circuit breaker with a maximum current of 10 A
Control element	Electromagnetic, micro-gap relay
Control method	remote – by OTA locally – using the button
Cooperation with internet control panel	AURATON Pulse
Operating range	approx. 30 m
Radio frequency	868,150 MHz; 868,450 MHz
Radio signal strength	Up to 11 dBm
Radio receiver category	2
Radio Protocol	AURA
Ingress protection	IP20

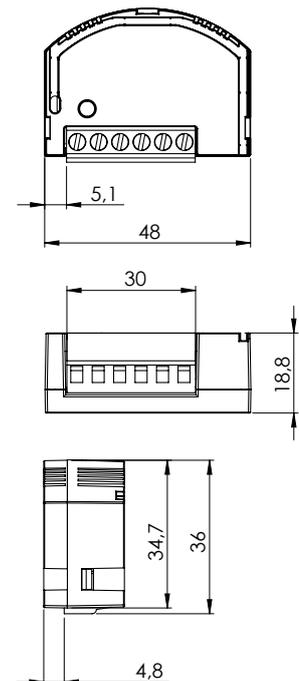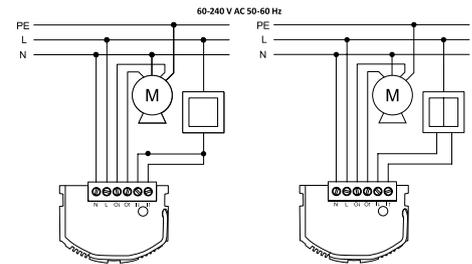

FOR SMARTER LIVING



Producer:
LARS, Swierkowa 14 St., 64-320 Niepruszewo, PL
tel. +48 61 840 40 40, e-mail: trade@auraton.pl
www.auraton.pl www.auratonsmart.com

